



ELEMENTO TRAVE TL

TL 80+20

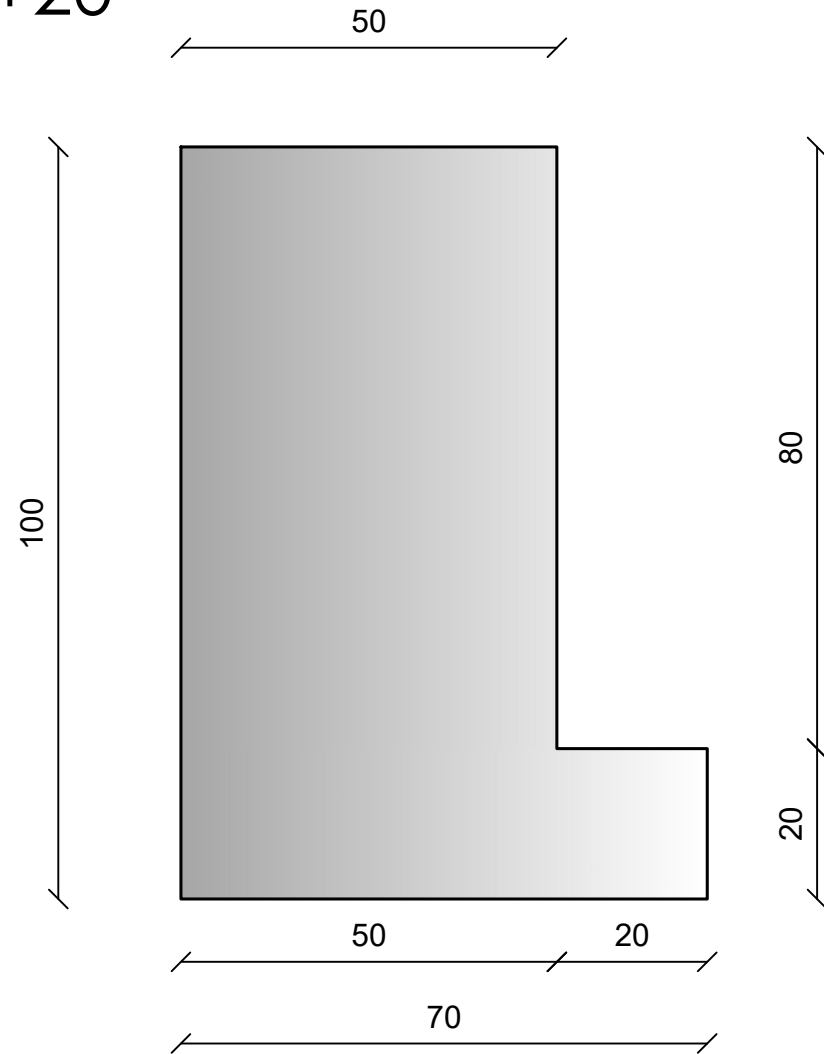

TL 80+20	Casseratura	3,400 m ² /m
	Calcestruzzo	0,540 m ³ /m
	Peso	1.350,00 Kg/m
	Area	5.400,00 cm ²
	Baricentro Y _i	47,04 cm
	Momento d'inerzia	1.428.309 cm ⁴

TL 90+20

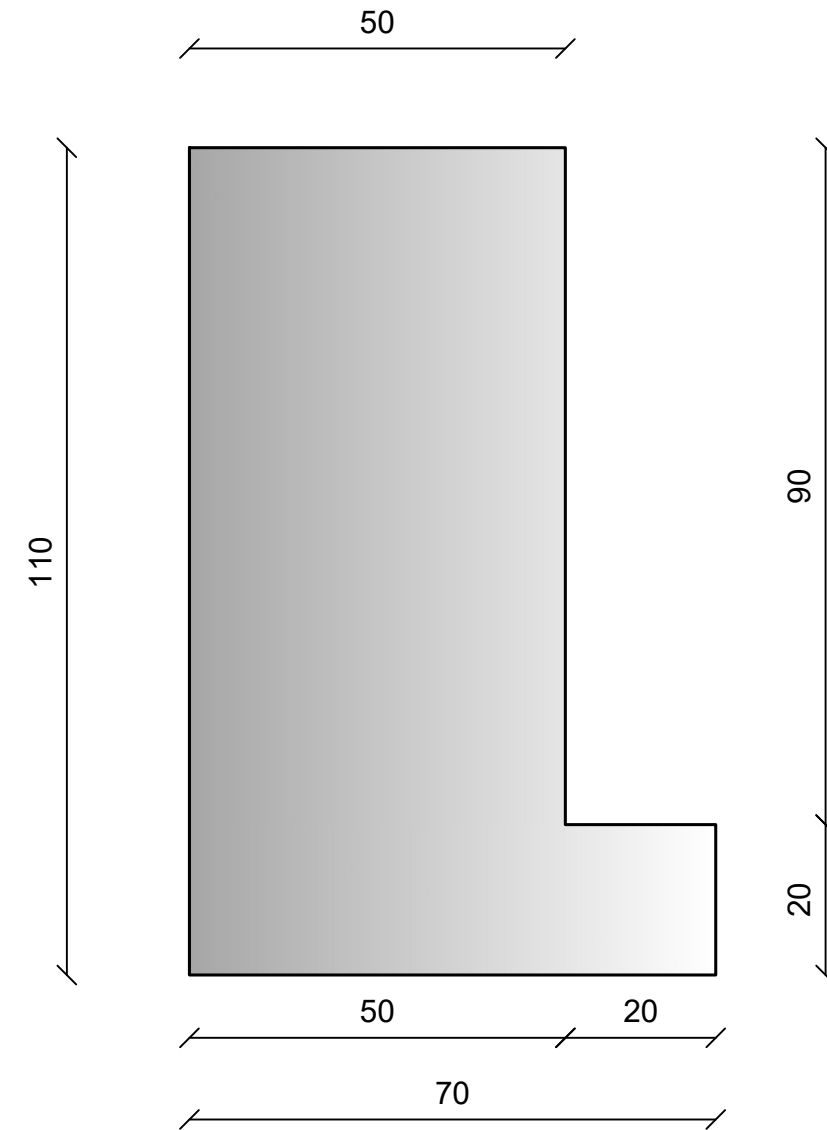

TL 90+20	Casseratura	3,600 m ² /m
	Calcestruzzo	0,590 m ³ /m
	Peso	1.475,00 Kg/m
	Area	5.900,00 cm ²
	Baricentro Y _i	51,94 cm
	Momento d'inerzia	1.543.648 cm ⁴



NIPA
PREFABBRICATI s.p.a.



Via Bonifica Armieri, 2 – 86079 Venafro (IS) • Tel. 0865.911116 - Fax 0865.927559 • P. iva e cod. fisc. 00903550945
www.gruppopatriciello.it – ufficioprogettazione@nipaprefabbricati.it