


ELEMENTO TRAVE TL

TL 100+20



TL 100+20	Casseratura	3,800 m ² /m
	Calcestruzzo	0,640 m ³ /m
	Peso	1.600,00 Kg/m
	Area	6.400,00 cm ²
	Baricentro Y _i	59,87 cm
	Momento d'inerzia	1.656.395 cm ⁴

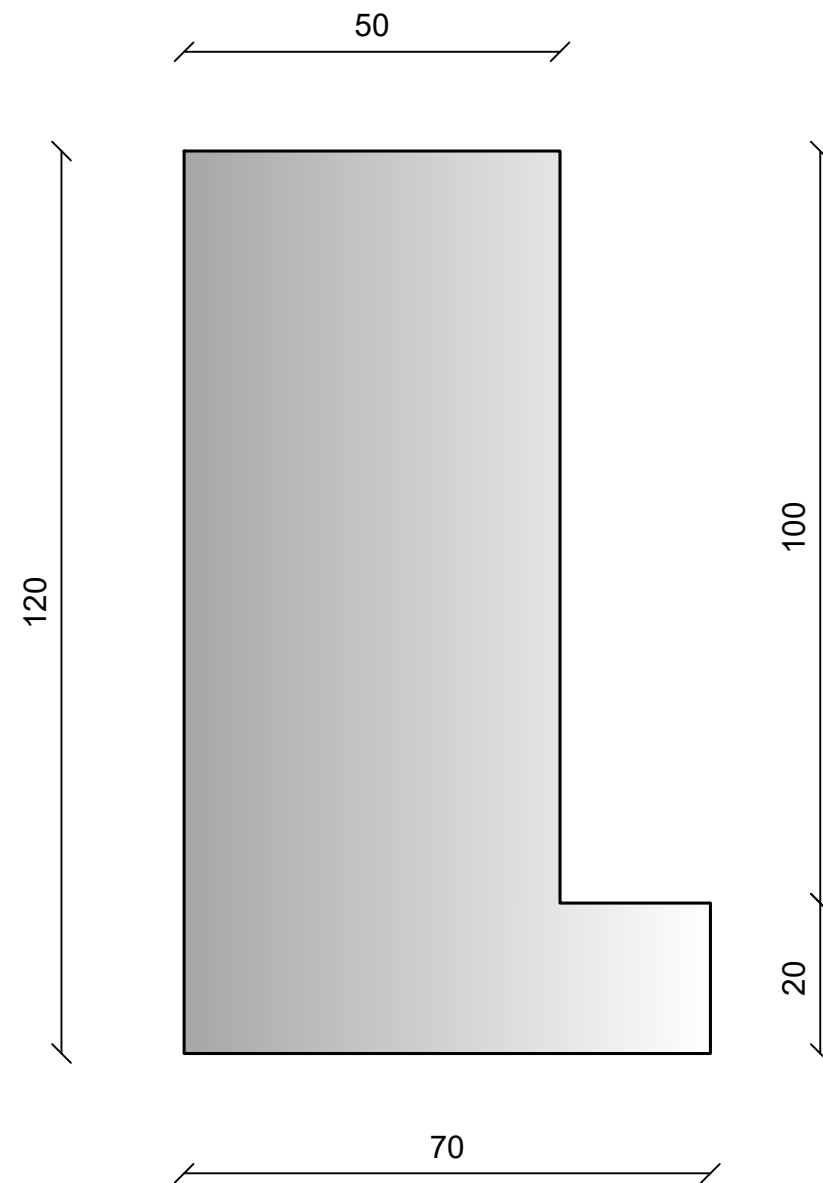

NIPA
PREFABBRICATI s.p.a.



Via Bonifica Armieri, 2 – 86079 Venafro (IS) • Tel. 0865.911116 - Fax 0865.927559 • P. iva e cod. fisc. 00903550945
www.gruppopatriciello.it – ufficioprogettazione@nipaprefabbricati.it