



# ELEMENTO TRAVE TR

## TR 60+30

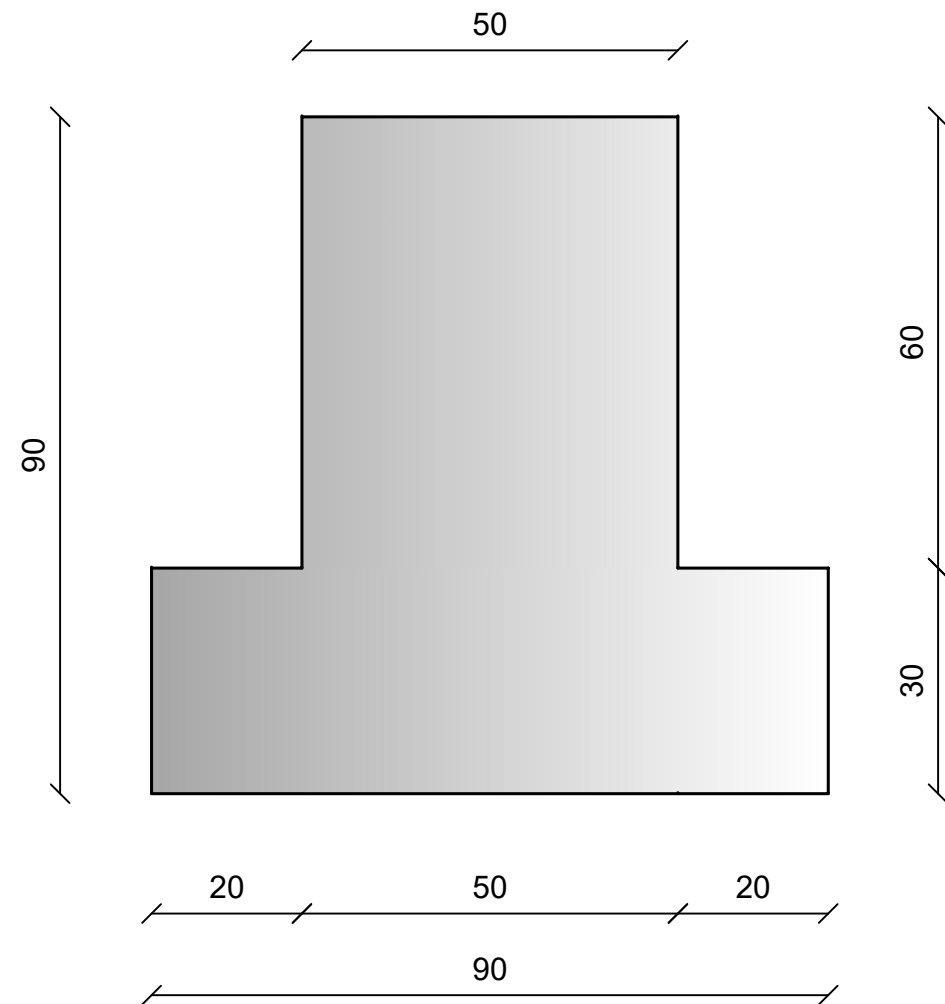

<b>TR 60+30</b>	Casseratura	3,600 m <sup>2</sup> /m
	Calcestruzzo	0,570 m <sup>3</sup> /m
	Peso	1.425,00 Kg/m
	Area	5.700,00 cm <sup>2</sup>
	Baricentro Y <sub>i</sub>	38,68 cm
	Momento d'inerzia	2.447.500 cm <sup>4</sup>

## TR 70+30

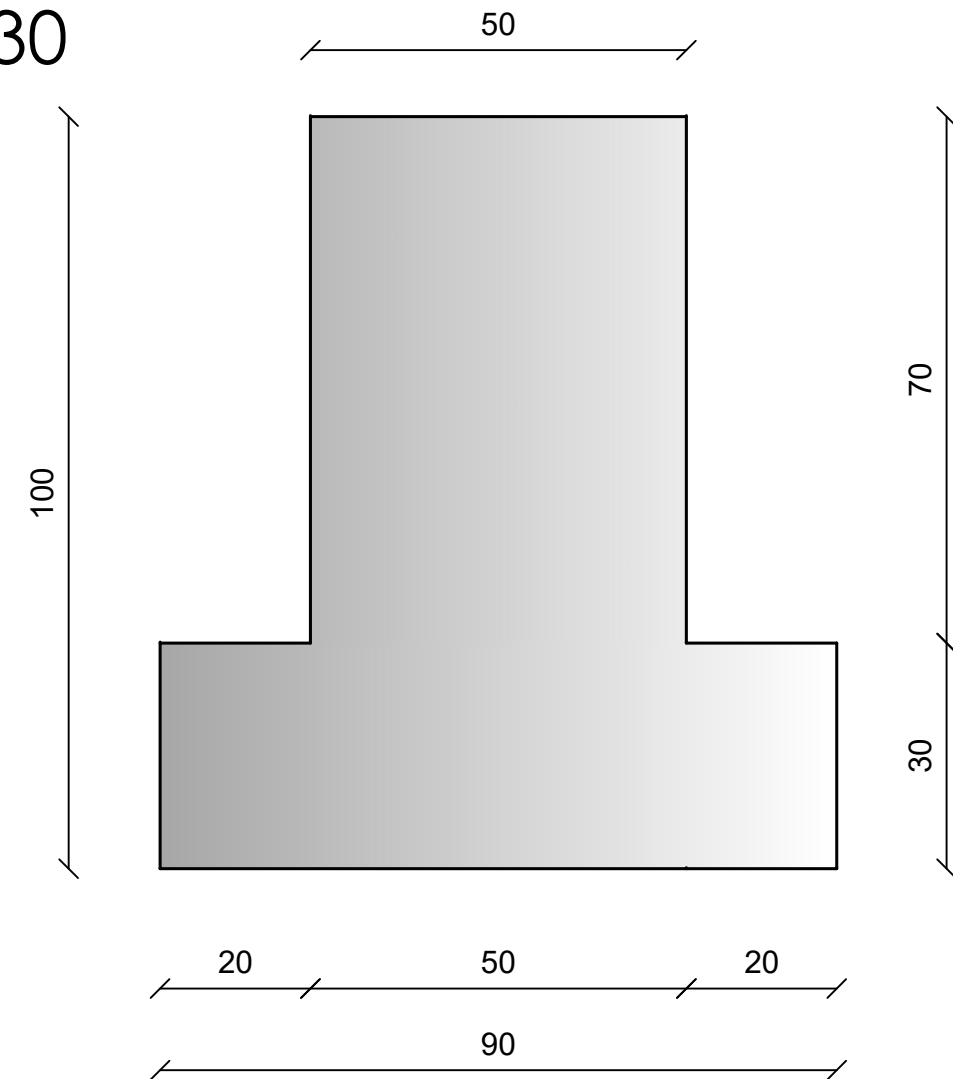

<b>TR 70+30</b>	Casseratura	3,800 m <sup>2</sup> /m
	Calcestruzzo	0,620 m <sup>3</sup> /m
	Peso	1.550,00 Kg/m
	Area	6.200,00 cm <sup>2</sup>
	Baricentro Y <sub>i</sub>	43,22 cm
	Momento d'inerzia	2.551.666 cm <sup>4</sup>



**NIPA**  
PREFABBRICATI s.p.a.



Via Bonifica Armieri, 2 – 86079 Venafro (IS) • Tel. 0865.911116 - Fax 0865.927559 • P. iva e cod. fisc. 00903550945  
www.gruppopatriciello.it – ufficioprogettazione@nipaprefabbricati.it