



ELEMENTO TRAVE TR

TR 80+30

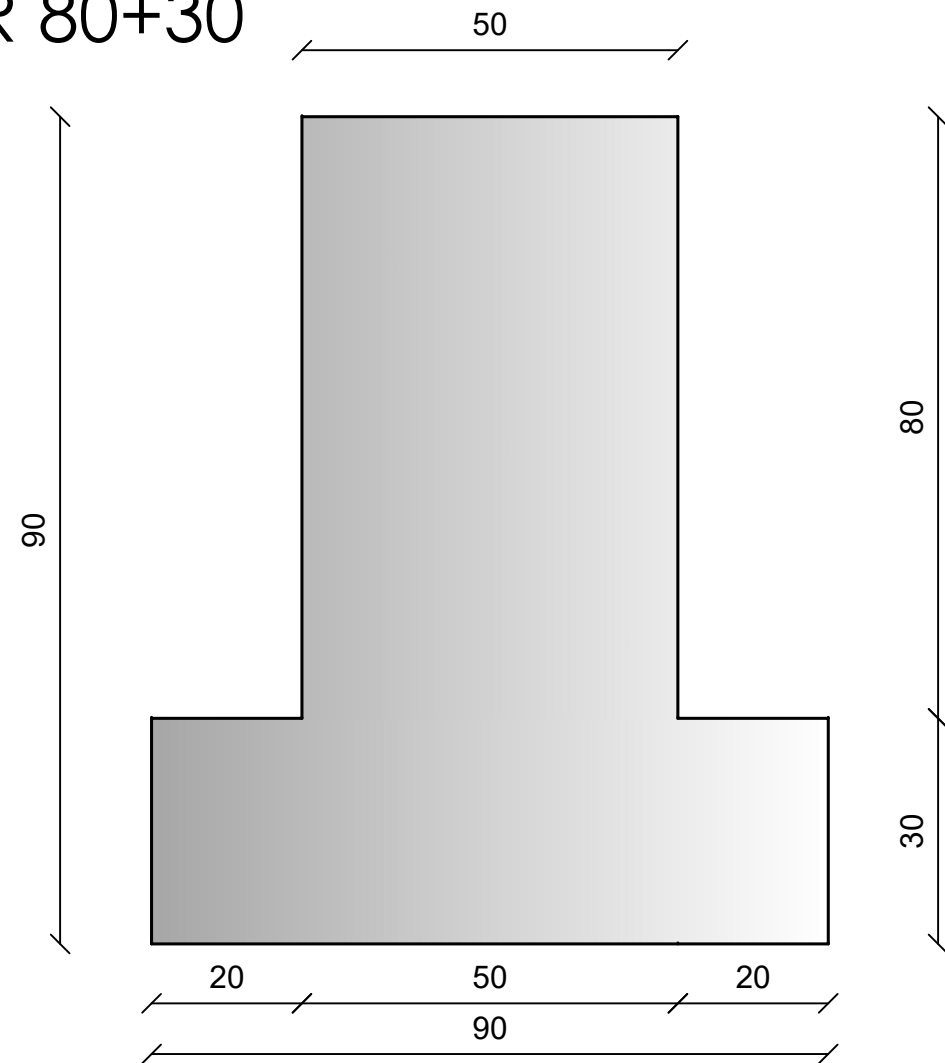

TR 90+30

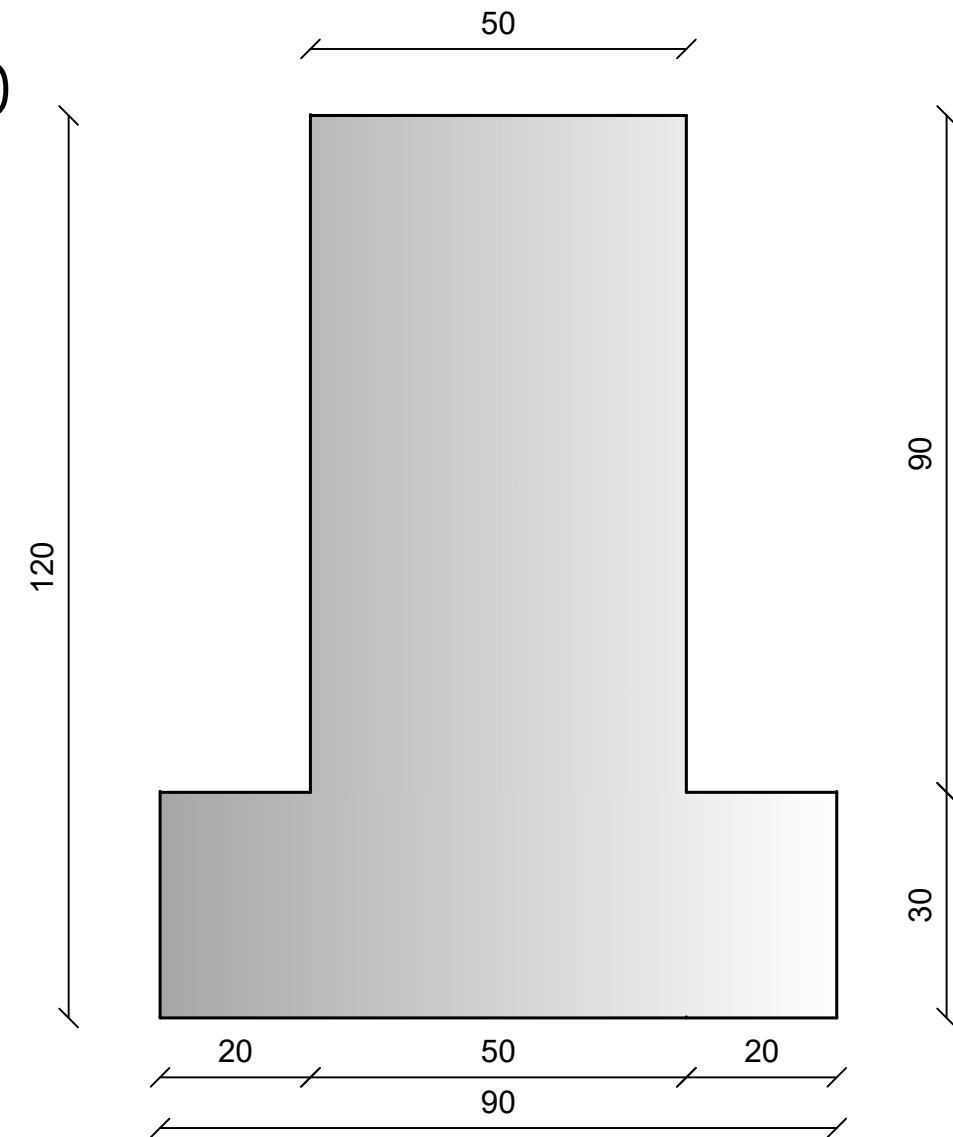

TR 80+30	Casseratura	4,000 m ² /m
	Calcestruzzo	0,670 m ³ /m
	Peso	1.675,00 Kg/m
	Area	6.700,00 cm ²
	Baricentro Y _i	47,84 cm
	Momento d'inerzia	2.655.833 cm ⁴

TR 90+30	Casseratura	4,200 m ² /m
	Calcestruzzo	0,720 m ³ /m
	Peso	1.800,00 Kg/m
	Area	7.200,00 cm ²
	Baricentro Y _i	52,50 cm
	Momento d'inerzia	2.760.000 cm ⁴



NIPA
PREFABBRICATI s.p.a.



Via Bonifica Armieri, 2 – 86079 Venafro (IS) • Tel. 0865.911116 - Fax 0865.927559 • P. iva e cod. fisc. 00903550945
www.gruppopatriciello.it – ufficioprogettazione@nipaprefabbricati.it