


ELEMENTO TRAVE TR

TL 100+30



TR 100+30	Cassatura	4,400 m ² /m
	Calcestruzzo	0,770 m ³ /m
	Peso	1.925,00 Kg/m
	Area	7.700,00 cm ²
	Baricentro Y _i	57,20 cm
	Momento d'inerzia	2.864.166 cm ⁴

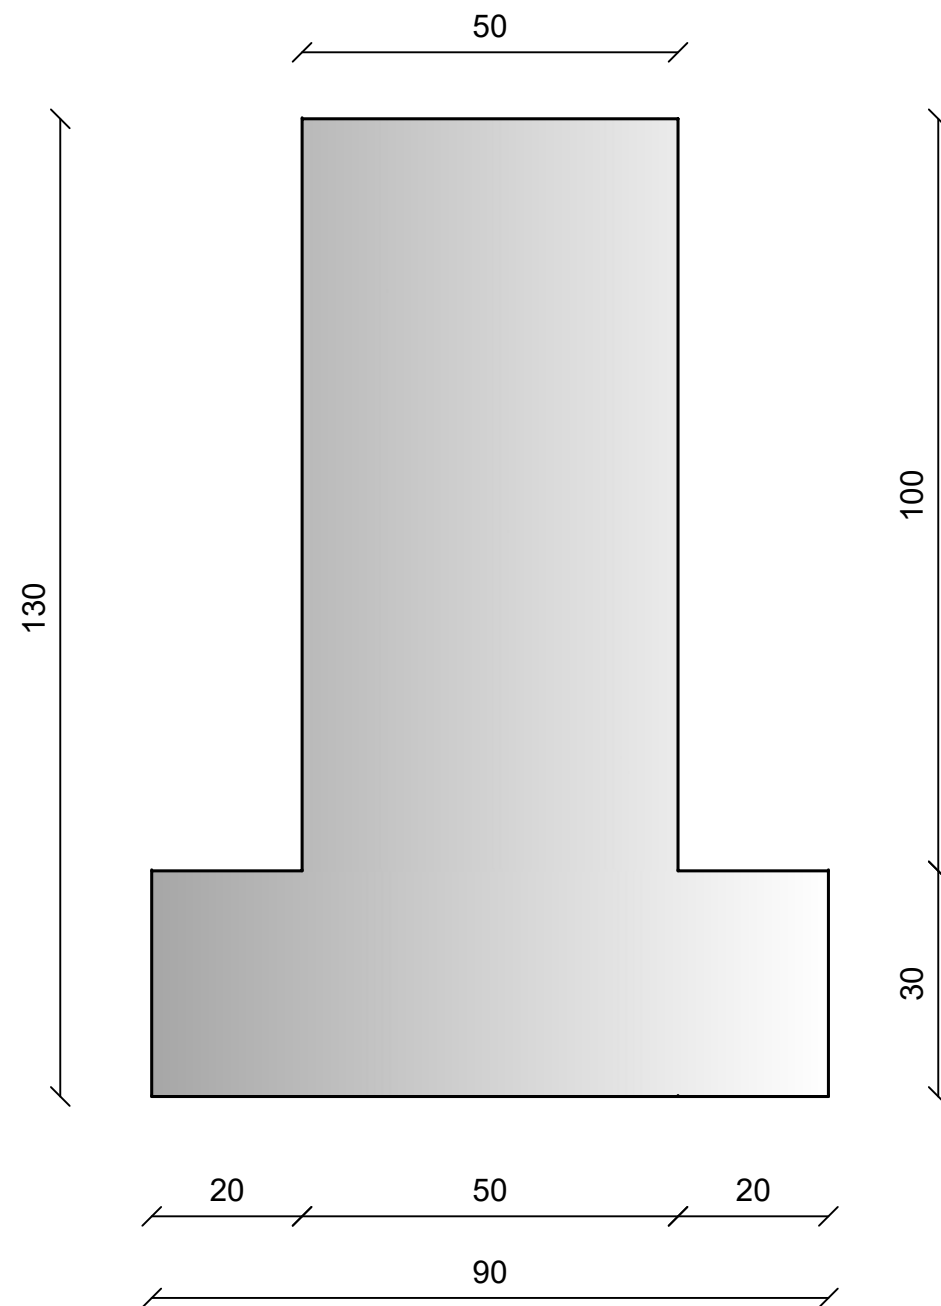

NIPA
PREFABBRICATI s.p.a.



Via Bonifica Armieri, 2 – 86079 Venafro (IS) • Tel. 0865.911116 - Fax 0865.927559 • P. iva e cod. fisc. 00903550945
www.gruppopatriciello.it – ufficioprogettazione@nipaprefabbricati.it